

UNCLASSIFIED

AD NUMBER

AD813798

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; MAY 1967. Other requests shall be referred to Atomic Energy Commission, Sandia Base Albuquerque, NM. This document contains export-controlled technical data.

AUTHORITY

AEDC ltr, 23 Jan 1975

THIS PAGE IS UNCLASSIFIED

2
AEDC-TR-67-98

ARCHIVE COPY
DO NOT LOAN

ay;



WIND TUNNEL TESTS ON A MODEL OF THE TOMAHAWK SOUNDING ROCKET AT $M_{\infty} = 5$

J. C. Uselton

ARO, Inc.

This document has been approved for public release
its distribution is unlimited.

May 1967

*Rev. 1st Edition
178.53 Jan 75
Super William
O. Cole*

This document is subject to special export controls
and each transmittal to foreign governments or foreign
nationals may be made only with prior approval of
the Atomic Energy Commission, Sandia Base, Albu-
querque, New Mexico.

**VON KÁRMÁN GAS DYNAMICS FACILITY
ARNOLD ENGINEERING DEVELOPMENT CENTER
AIR FORCE SYSTEMS COMMAND
ARNOLD AIR FORCE STATION, TENNESSEE**

AEDC TECHNICAL LIBRARY



TTTS 1E000 020 5

PROPERTY OF U. S. AIR FORCE
AEDC LIBRARY
AF 40(600)1200

NOTICES

When U. S. Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Qualified users may obtain copies of this report from the Defense Documentation Center.

References to named commercial products in this report are not to be considered in any sense as an endorsement of the product by the United States Air Force or the Government.

WIND TUNNEL TESTS ON A MODEL OF THE
TOMAHAWK SOUNDING ROCKET AT $M_\infty = 5$

J. C. Usselton
ARO, Inc.

This document has been approved for public release
its distribution is unlimited. *Per AF Little dt 23 January, 1975*
David William O. Cole.

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of the Atomic Energy Commission, Sandia Base, Albuquerque, New Mexico.

FOREWORD

The work reported herein was done for the Sandia Corporation, contractor for the United States Atomic Energy Commission, under System 921D.

The results of the tests presented were obtained by ARO, Inc. (a subsidiary of Sverdrup & Parcel and Associates, Inc.), contract operator of the Arnold Engineering Development Center (AEDC), Air Force Systems Command (AFSC), Arnold Air Force Station, Tennessee, under Contract AF40(600)-1200. The tests were conducted February 16 and 17, 1967, under ARO Project No. VA1760, and the manuscript was submitted for publication on April 20, 1967.

Information in this report is embargoed under the Department of State International Traffic in Arms Regulations. This report may be released to foreign governments by departments or agencies of the U. S. Government subject to approval of the U. S. Atomic Energy Commission. Private individuals or firms require a Department of State export license.

This technical report has been reviewed and is approved.

James N. McCreedy
Major, USAF
AF Representative, VKF
Directorate of Test

Leonard T. Glaser
Colonel, USAF
Director of Test

ABSTRACT

Force and moment data and vapor-screen photographs were obtained in the 40-in. supersonic tunnel of the von Kármán Gas Dynamics Facility on a Tomahawk sounding rocket model. Data were obtained with and without model spin at Mach number 5 at a Reynolds number, based on model length, of 27.3×10^6 . Side force and moment data are presented for 0- and 1.5-deg canted fins along with vapor-screen photographs for the zero cant fins. Also, data are presented illustrating the effects of an offset nose.

CONTENTS

	<u>Page</u>
ABSTRACT	iii
NOMENCLATURE	vi
I. INTRODUCTION	1
II. APPARATUS	
2.1 Wind Tunnel	1
2.2 Model	1
2.3 Instrumentation and Techniques	2
III. RESULTS AND DISCUSSION	3
REFERENCES	4

APPENDIX

Illustrations

Figure

1. Model Details	7
2. Model Installation Photograph	8
3. Variations of C_y and C_n with Angle of Attack, $\delta = 0, \pm 1.5 \text{ deg}$	9
4. Photographs of the Leeward-Flow Patterns with Model Locked ($P = 0$)	10
5. Explanatory Sketch of Vapor-Screen Photographs	11
6. Effects of the Nose Pitched 1 deg at $\phi_n = 200 \text{ deg}$ on the C_y and C_n Variations ($P = 0, \delta = 0$)	12

NOMENCLATURE

A	Reference area, 3.1416 in. ²
C_n^*	Yawing-moment coefficient, yawing moment/ $q_\infty Ad$
C_y^*	Side-force coefficient, side force/ $q_\infty A$
d	Model diameter, 2 in.
ℓ	Model length, 46.758 in.
M_∞	Free-stream Mach number
P^*	Model spin rate, rpm
p_o	Tunnel stilling chamber pressure, psia
q_∞	Free-stream dynamic pressure, psia
Re_ℓ	Reynolds number based on model length
T_o	Tunnel stilling chamber temperature, °R
α	Angle of attack, deg
δ	Fin cant angle, deg
ϕ_n^*	Nose roll angle, deg

*See Fig. 1 for indication of positive directions.

SECTION I INTRODUCTION

In 1966, an extensive wind tunnel test program (Ref. 1) was conducted on a model of the Tomahawk sounding rocket to investigate the Magnus effects which were thought to be contributing to the coning problems encountered on several Tomahawk flights. The data from this investigation indicated that Magnus effects were present and also that unsymmetrical leeside vortices were causing small side loads when the model was not spinning. Another test program was initiated to further study the leeside flow patterns using the vapor-screen technique and also obtain force and moment data. Possible effects of aeroelastic bending which had been analytically investigated by Reis and Sundberg (Ref. 2) were investigated by obtaining data on the model with an offset nose.

Data were obtained in the 40-in. supersonic tunnel (Gas Dynamic Wind Tunnel, Supersonic (A)) of the von Kármán Gas Dynamics Facility (VKF) on the 2/9-scale Tomahawk model at Mach 5 at a Reynolds number of 27.3×10^6 , based on model length. Force and moment data were obtained at angles of attack from 0 to 15 deg, and vapor-screen photographs were obtained at angles of attack from 0 to 20 deg.

SECTION II APPARATUS

2.1 WIND TUNNEL

Tunnel A is a continuous, closed-circuit, variable density wind tunnel with an automatically driven flexible-plate-type nozzle and a 40- by 40-in. test section. The tunnel operates at Mach numbers from 1.5 to 6 at maximum stagnation pressures from 29 to 200 psia, respectively, and stagnation temperatures up to 300°F ($M_\infty = 6$). Minimum operating pressures range from about one-tenth to one-twentieth of the maximum pressures. A description of the tunnel and airflow calibration information may be found in Ref. 3.

2.2 MODEL

The 2/9-scale Tomahawk model is an ogive-cylinder with cruciform 45-deg swept fins mounted at the model base and has a fineness ratio of 23.4. Model details are given in Fig. 1, and a photograph of the model

installed in Tunnel A is shown in Fig. 2. The model was mounted on two ball bearings with their inner races fixed to an inner shell that was attached to the balance forward taper. The model could be locked with pins fixing the outer shell to the inner shell. Model spin rates were obtained by canting the fins. Also, the model nose could be offset 1 deg, and this offset could be fixed at various roll angles.

2.3 INSTRUMENTATION AND TECHNIQUES

Model force and moment measurements were made with a four-component, moment-type, strain-gage balance supplied and calibrated by the VKF. The balance has small outrigger side beams to obtain the sensitivity required to accurately measure small side loads while maintaining adequate balance stiffness for large pitch loads. Before the tests, a range of static loads was applied to the balance to simulate the model loads anticipated during testing. All balance components were loaded singly and simultaneously, and a range of uncertainties in measurement was determined from the differences between the applied loadings and the values calculated by the balance calibration equations used in the final data reduction. Listed below with the balance design loads are the ranges of static loads applied and the uncertainties for the components loaded singly and simultaneously:

Component	Design Load	Range of Static Loadings	Uncertainties
Normal Force, lb	500	25-150	0.25-0.75
Pitching Moment, in. -lb	2500	75-500	1.00-4.80
Side Force, lb	25	1-6.5	0.01-0.12
Yawing Moment, in. -lb	125	10-40	0.10-0.70

For the zero spin data, the model was locked by pinning the outside shell of the model to the inner shell. When the model was tested with the canted fins, it was allowed to free spin at its steady-state value. Up to seven points were taken at each angle of attack when the model was spinning, whereas two or three data points were usually taken with the model locked (zero spin). The numerous data points were taken to average the scatter encountered because of model vibration and the small magnitude of the side forces. The data points presented in this report are the arithmetic average of all the data points taken at the particular angle of attack. Model spin rates were measured with a high intensity Strobotac® by synchronizing on a fin through the tunnel window. The positive directions for the side loads and spin are given in Fig. 1.

The vapor-screen technique was used to study the leeward flow patterns. Steam was injected into the tunnel upstream of the stilling chamber. Two 20-mw laser light sources were used with their beams being deflected by cylindrical lenses such that they produced a narrow slit of light. The plane of light could be positioned at different stations along the body; thus, the leeward flow field could be traversed.

Force and moment data and vapor-screen photographs were obtained for the model locked ($P = 0$) with the straight nose and with the nose pitched down 1 deg and rolled ± 20 deg. Data were also obtained for the basic model spinning (cant angles of ± 1.5 deg). The test conditions were as follows:

M_∞	p_0 , psia	T_0 , °R	$Re_l \times 10^{-6}$
5.01	150	610	27.3

SECTION III RESULTS AND DISCUSSION

In Fig. 3, the variations of C_y and C_n with angle of attack are presented for fin cant angles of 0 and ± 1.5 deg. As mentioned previously in the Introduction, a thorough treatment of the aerodynamic characteristics of the Tomahawk model, including the effects of spin, is given in Ref. 1. The spin data shown in Fig. 3 for $\delta = \pm 1.5$ deg, $P_\alpha = 0 = 2850$ rpm repeated the trends of the previous tests. There was only a small variation of spin rate for the angle-of-attack range tested.

The zero spin data, presented in Fig. 3, show, as was determined previously (Ref. 1), that at the higher angles of attack the model begins to experience side loads which are attributed to the leeward vortex pattern becoming asymmetric. This change in the vortex pattern is seen in Fig. 4 where the vapor-screen photographs are presented for the model locked ($P = 0$). An explanatory sketch of the vapor-screen photographs is given in Fig. 5; the leeward wake and vortices appear black in the plane of light. The photographs were taken at an angle from outside the tunnel windows. The model and the light cut off by the model create the dark region at the bottom of the photographs. At 10-deg angle of attack, the photographs show a symmetric pair of vortices which tend to elongate and become slightly asymmetric at $\alpha = 15$ deg. When the angle of attack is increased to 17 deg, the photographs show that the vortices have begun to break off into the familiar von Kármán vortex street. No notable effects of spin were detected in the vapor-screen photographs.

The effects of the nose being pitched to 1 deg with respect to the body (nose at $\phi_n = 200$ deg, see Fig. 1) are presented in Fig. 6. Pitching the nose produced considerable variation of C_y and C_n with angle of attack.

REFERENCES

1. Uselton, James C. "Aerodynamic Characteristics of a High Fineness Ratio Model with Various Spin Rates at $M_\infty = 3.0$ and 5.0 ." AEDC-TR-66-171 (AD489477), September 1966.
2. Reis, George E. and Sundberg, Wayne D. "Calculations of the Aeroelastic Bending of a Sounding Rocket Based on Flight Data." Paper presented at the AIAA Sounding Rocket Vehicle Technology Specialist Conference, February 27, 1967.
3. Test Facilities Handbook (Sixth Edition), "von Kármán Gas Dynamics Facility, Vol. 4." Arnold Engineering Development Center, November 1966.

**APPENDIX
ILLUSTRATIONS**



Nose Can Be Set with 1-deg Droop which Can Be Fixed at Various Roll Angles

6.000

0.020R

18.500R

0.042

14.1

Station 0.000

Moment Reference

Reference Length = 2.000 in.

Reference Area = 3.142 in.²

All Dimensions in Inches

23.379

+ δ , Fin Cant Angle

41.890 44.957 46.758

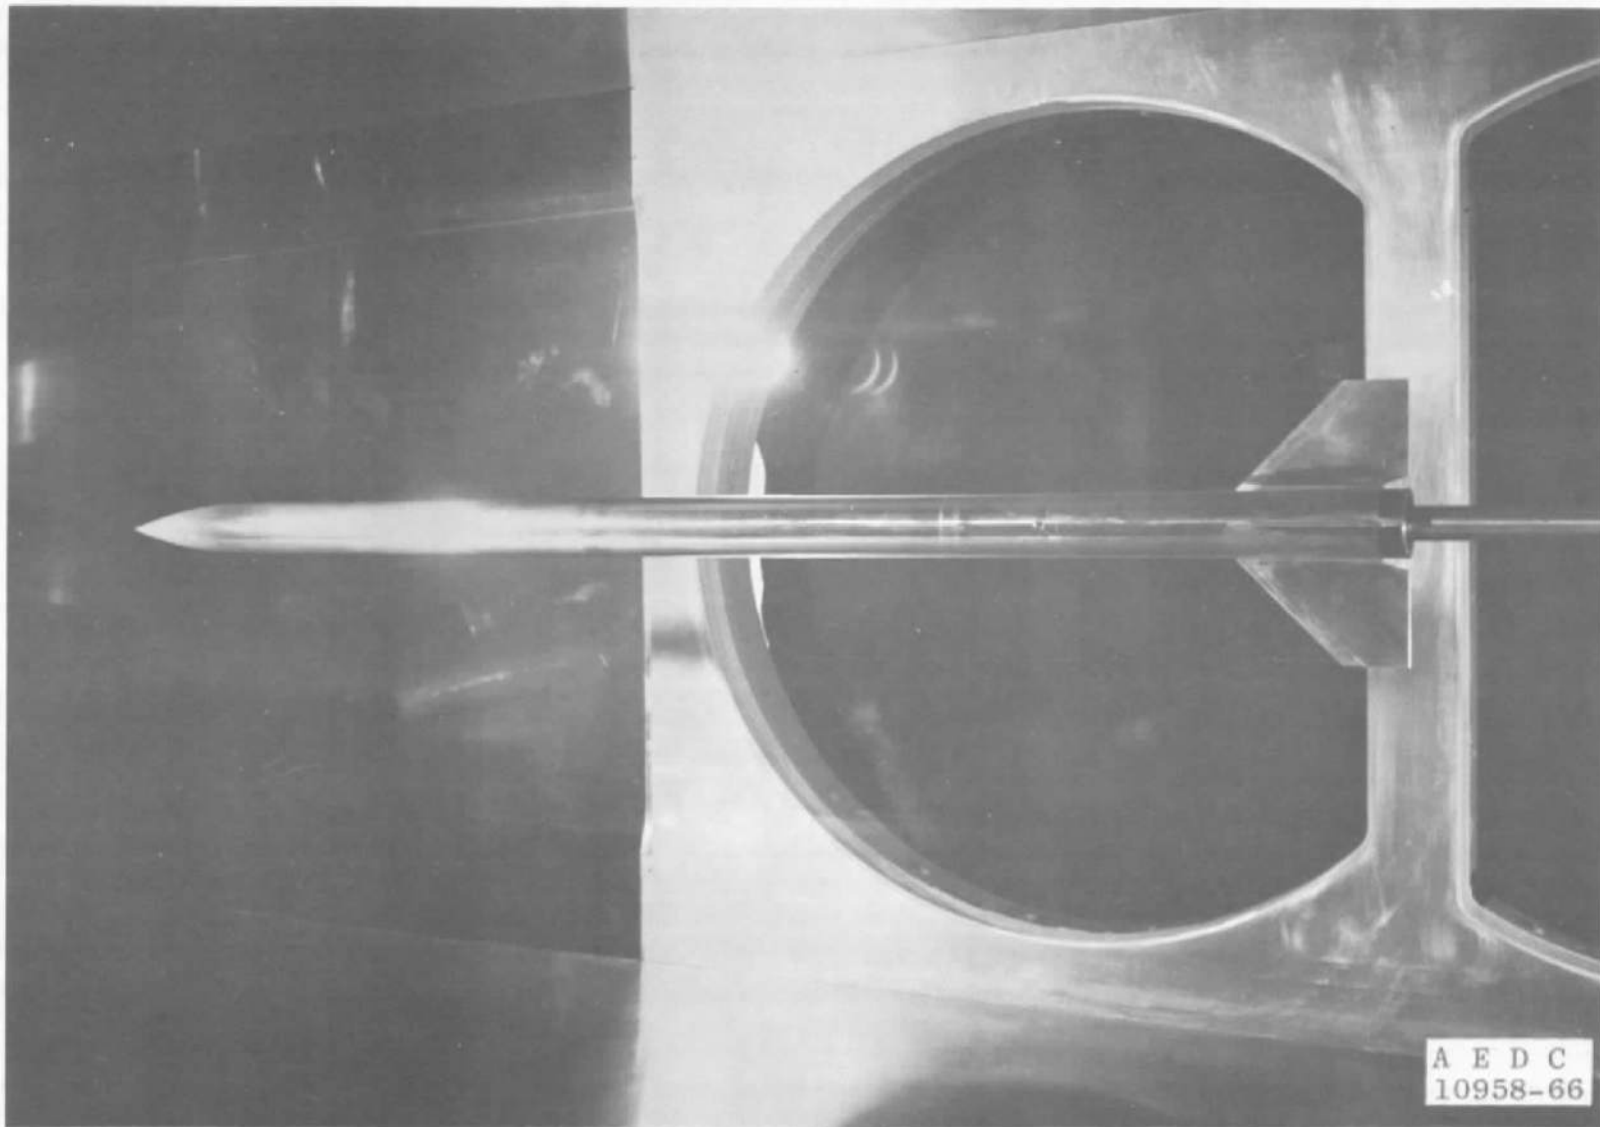


Fig. 2 Model Installation Photograph

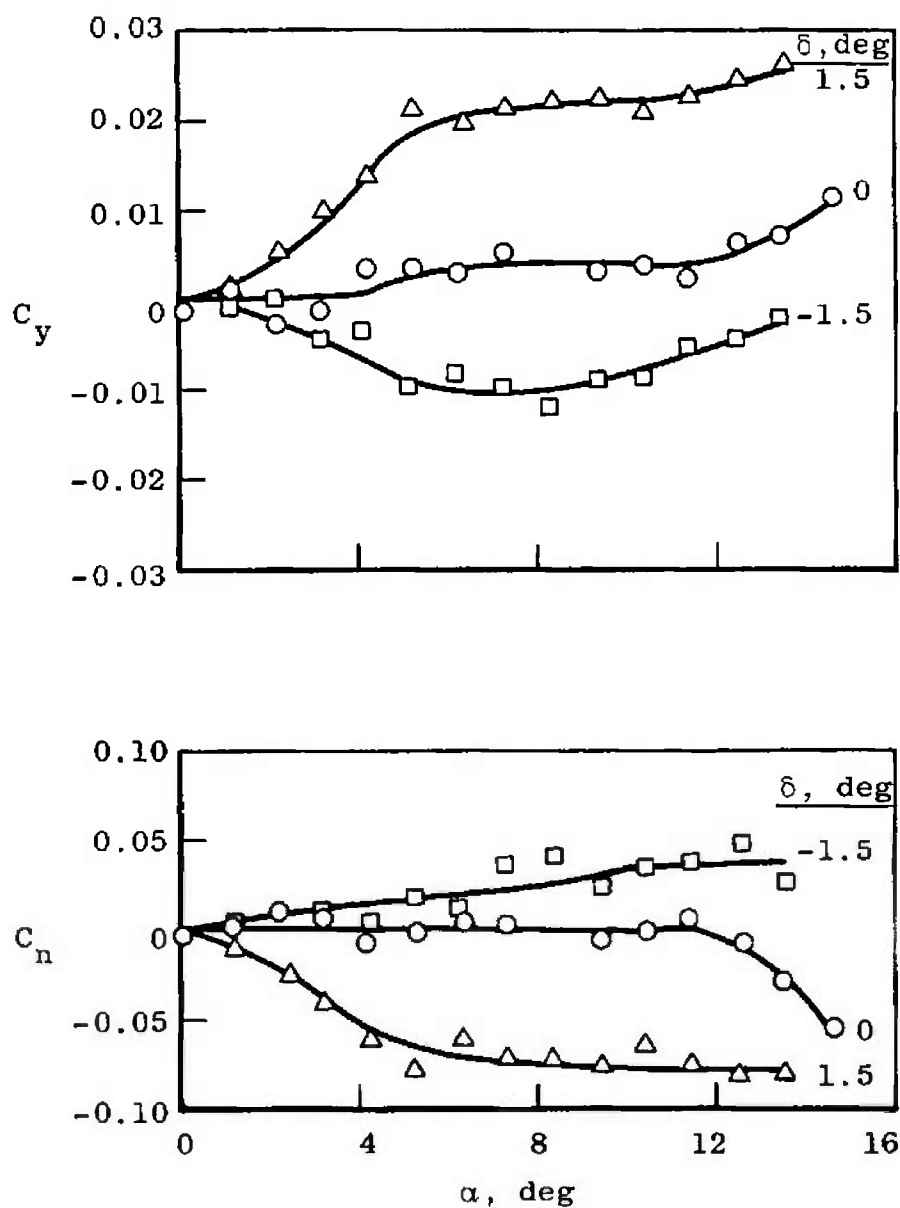


Fig. 3 Variations of C_y and C_n with Angle of Attack, $\delta = 0, \pm 1.5$ deg



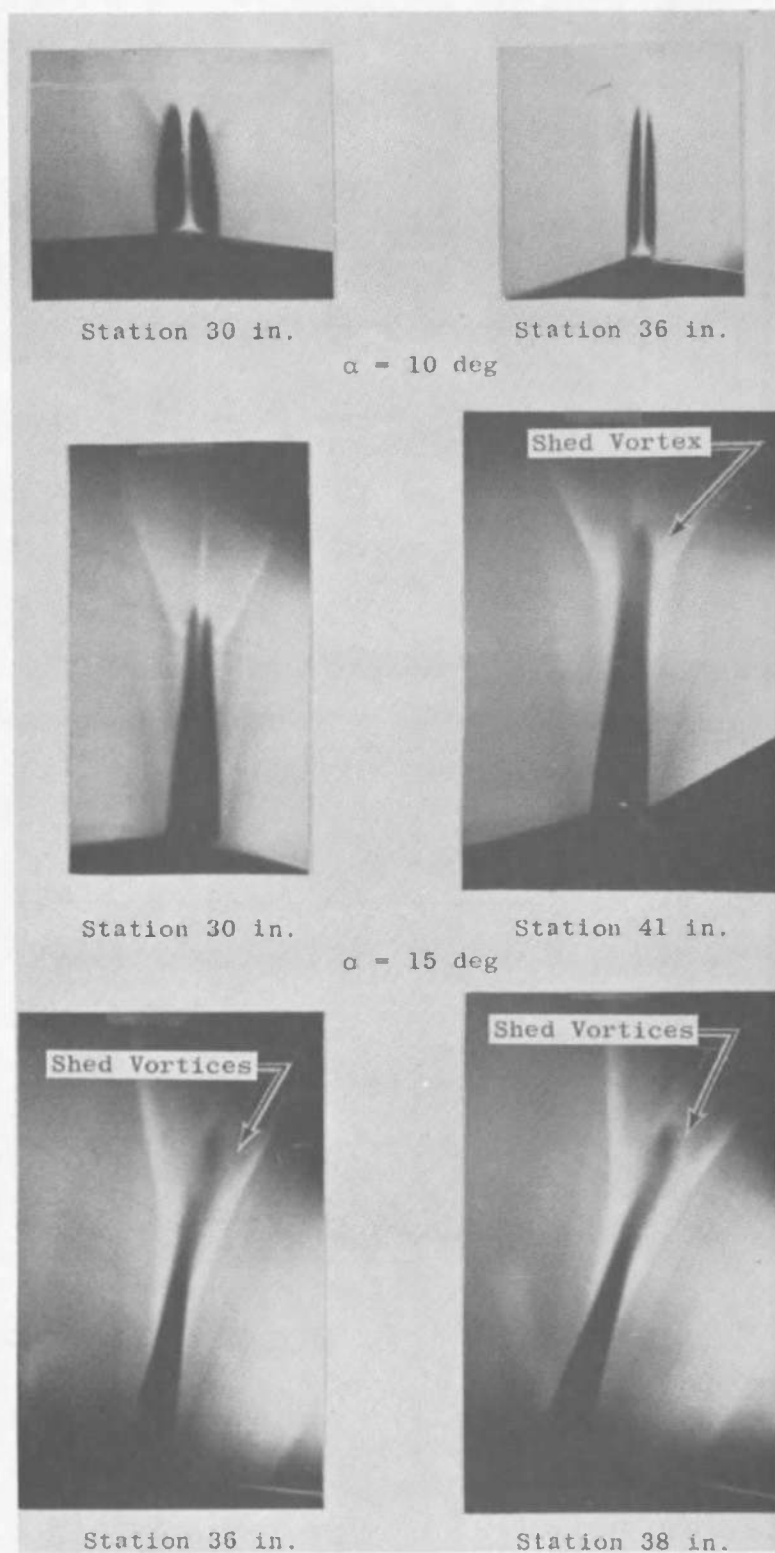


Fig. 4 Photographs of the Leeward-Flow Patterns
 with Model Locked ($P = 0$)

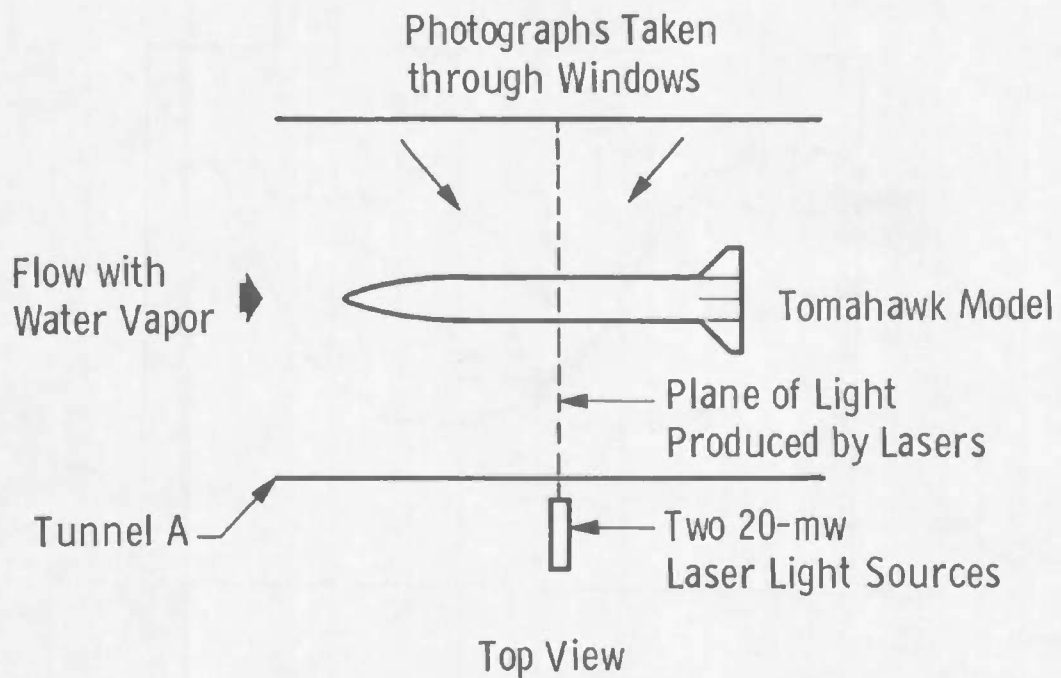

Leeward Wake and Vortices Show Up Black Against the Illuminated Fog

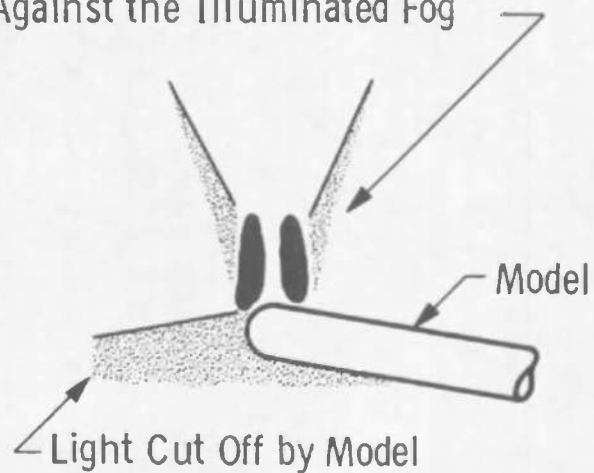

Photographic View
Looking Downstream

Fig. 5 Explanatory Sketch of Vapor-Screen Photographs

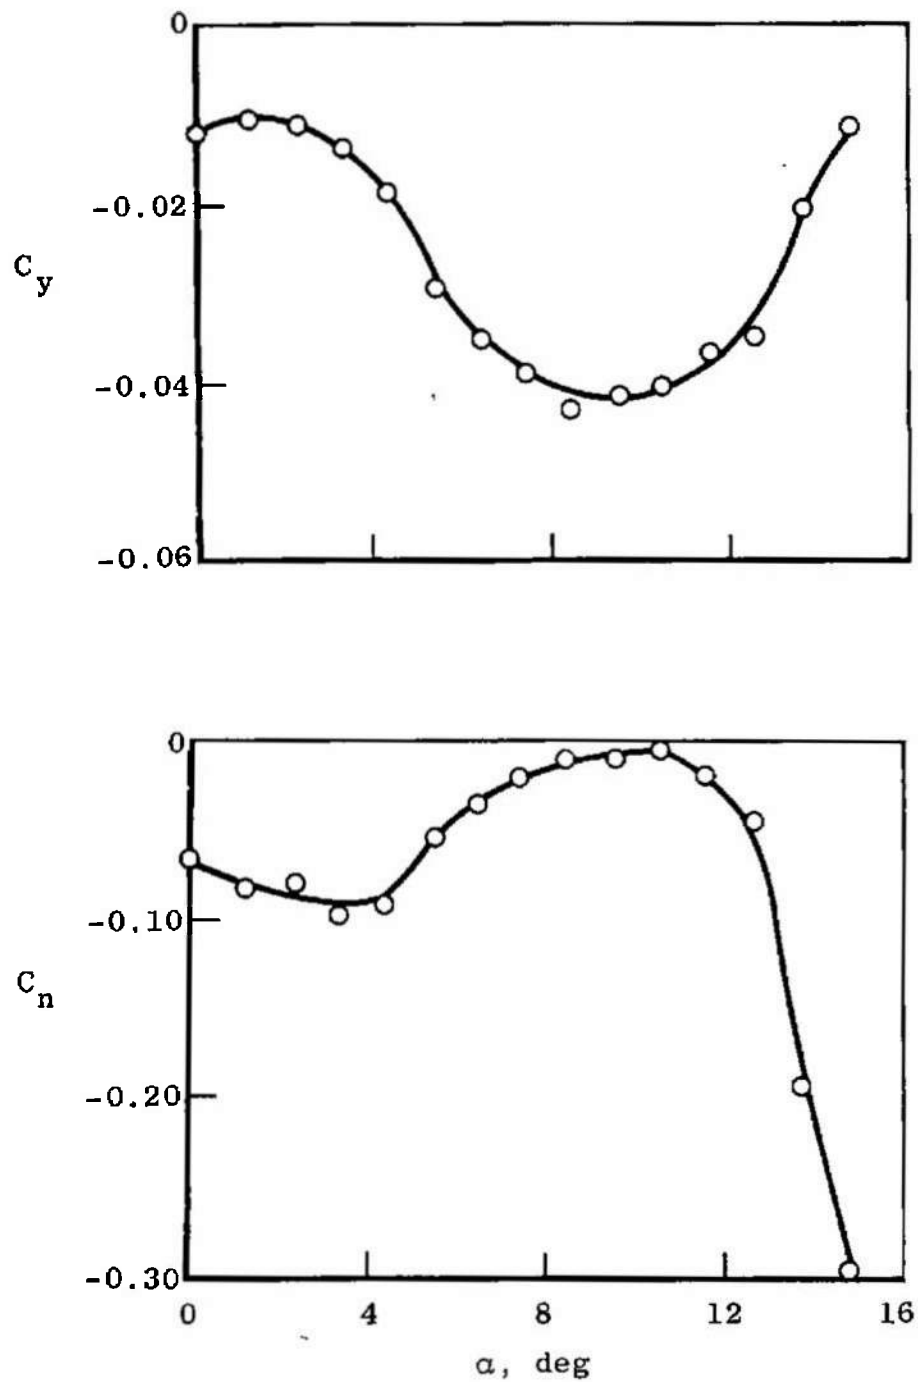


Fig. 6 Effects of the Nose Pitched 1 deg at $\phi_n = 200$ deg on the C_y and C_n Variations ($P = 0$, $\delta = 0$)

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1 ORIGINATING ACTIVITY (Corporate author) Arnold Engineering Development Center ARO, Inc., Operating Contractor Arnold Air Force Station, Tennessee		2a REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2b GROUP N/A	
3 REPORT TITLE WIND TUNNEL TESTS ON A MODEL OF THE TOMAHAWK SOUNDING ROCKET AT $M_{\infty} = 5$			
4 DESCRIPTIVE NOTES (Type of report and inclusive dates) N/A			
5 AUTHOR(S) (Last name, first name, initial) Uselton, J. C., ARO, Inc.			
6 REPORT DATE May 1967		7a TOTAL NO. OF PAGES 18	7b NO. OF REFS 3
8a CONTRACT OR GRANT NO. AF 40(600)-1200		9a ORIGINATOR'S REPORT NUMBER(S) AEDC-TR-67-98	
b PROJECT NO. c System 921D		9b OTHER REPORT NO(S) (Any other numbers that may be assigned this report) N/A	
10 AVAILABILITY/LIMITATION NOTES This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of Atomic Energy Commission, Sandia Base, Albuquerque, New Mexico.			
11 SUPPLEMENTARY NOTES Available in DDC		12. SPONSORING MILITARY ACTIVITY Atomic Energy Commission Sandia Base Albuquerque, New Mexico	
13 ABSTRACT Force and moment data and vapor-screen photographs were obtained in the 40-in. supersonic tunnel of the von Kármán Gas Dynamics Facility on a Tomahawk sounding rocket model. Data were obtained with and without model spin at Mach number 5 at a Reynolds number, based on model length, of 27.3×10^6 . Side force and moment data are presented for 0- and 1.5-deg canted fins along with vapor-screen photographs for the zero cant fins. Also, data are presented illustrating the effects of an offset nose.			

This document has been approved for public release
its distribution is unlimited. Per AF Letter 87-1
23 January 75.
Signed William O. Cole

KEY WORDS

LINK A

LINK B

LINK C

ROLE

WT

ROLE

WT

ROLE

WT

Tomahawk rocket
hypersonic flow
force data
vapor-screen photographs
fins
offset nose

1. Missiles -- Tomahawk.
2. Sounding rockets
3. Missiles -- Forces.
1-12.

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical content. The assignment of links, rules, and weights is optional.